


Title Dielectric Filter	Application Duplexer for 800MHz	Document No. FM-279-01	Sheet 1/2
----------------------------	------------------------------------	---------------------------	--------------

UBE P/N: UX0836L279



	Tx Side		Rx Side	
Center Freq.(Fo)	836.5 MHz (824-849)		881.5 MHz (869-894)	
Band Width	+/- 12.5 MHz		+/- 12.5MHz	
Insertion Loss	1.3 dB	(1.8 max)	2.0 dB	(3.3 max)
Return Loss	16 dB	(12 min)	12 dB	(10 min)
Ripple	- dB	(- max)	- dB	(- max)
VSWR	-	(- max)	-	(- max)
Attenuation	804	10 dB (6 min)	824-849	58 dB (55.5 min)
	869	38 dB (34.5 min)	933-958	52 dB (45 min)
	894	52 dB (45 min)	978-1004	55 dB (47 min)

This catalog shows Typical Value [25°C]. The data in () show Specifications [-40°C ~ 85°C].

Tx Side

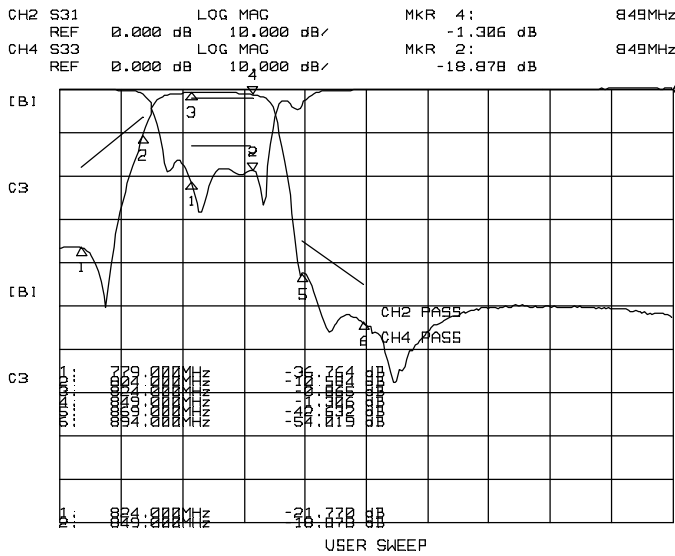

Rx Side

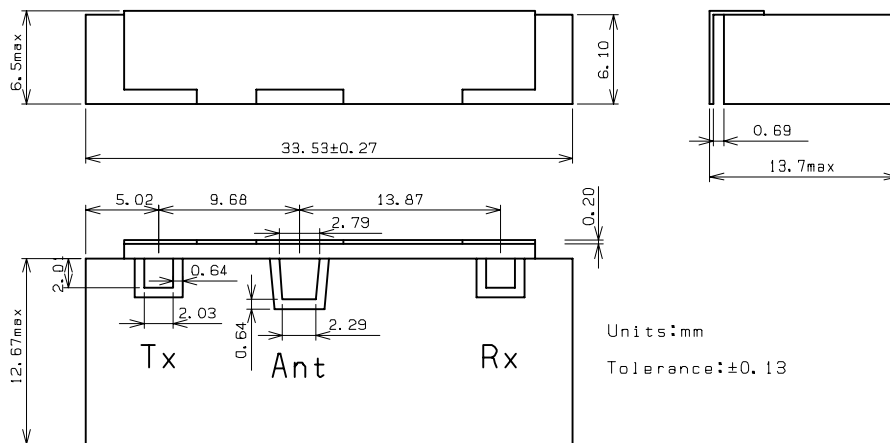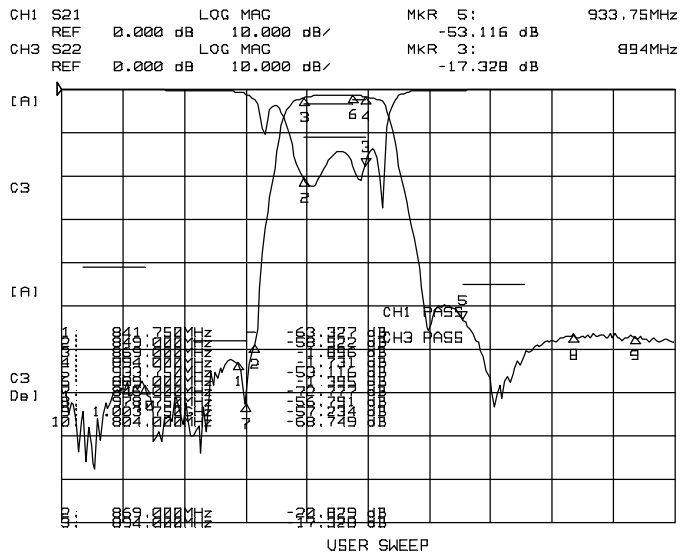

Outside dimensions

