
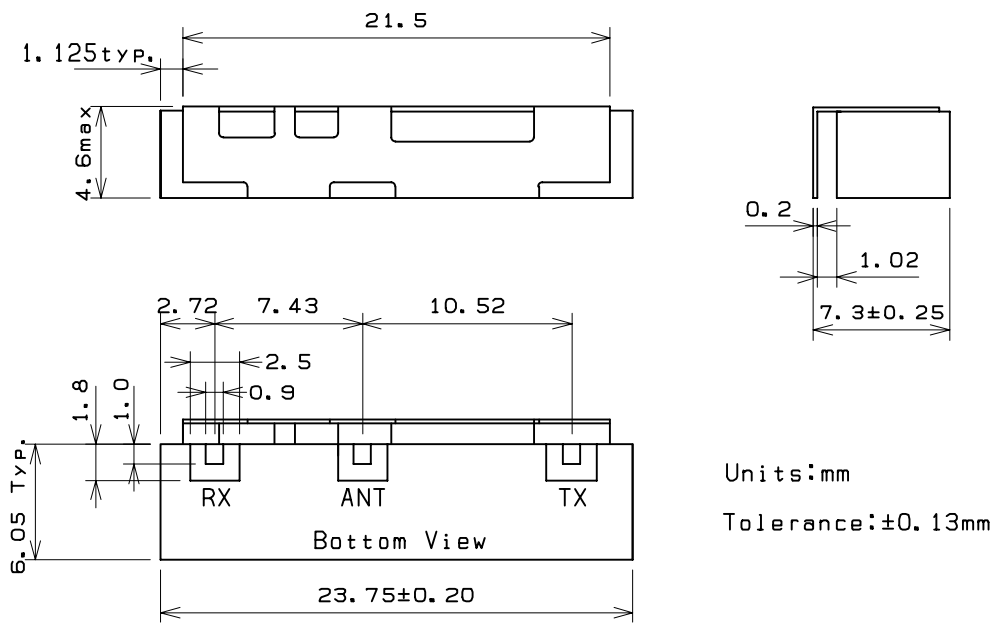


Title Dielectric Filter	Application Duplexer for DCS Base Station	Document No. FM-L228-04	Sheet 1/1
----------------------------	--	----------------------------	--------------

UBE P/N: UX1747L228


	Tx Side	Rx Side
Center Freq.(Fo)	1842.5 MHz (1805-1880)	1747.5 MHz (1710-1785)
Band Width	+/- 37.5 MHz	+/- 37.5 MHz
Insertion Loss	3.0 dB (4.0 max)	3.0 dB (3.5 max)
Return Loss	14 dB (10 min)	14 dB (10 min)
Ripple	2.4 dB (2.7 max)	2.5 dB (2.7 max)
Attenuation	1710-1785 52 dB (50 min)	1805-1880 49 dB (45 min)
Isolation	1710 to 1785MHz : 53dB (51dB min) 1805 to 1880MHz : 50dB (47dB min)	



This catalog shows Typical Value [25°C]. The data in ( ) show Specifications [-40°C ~ 85°C].

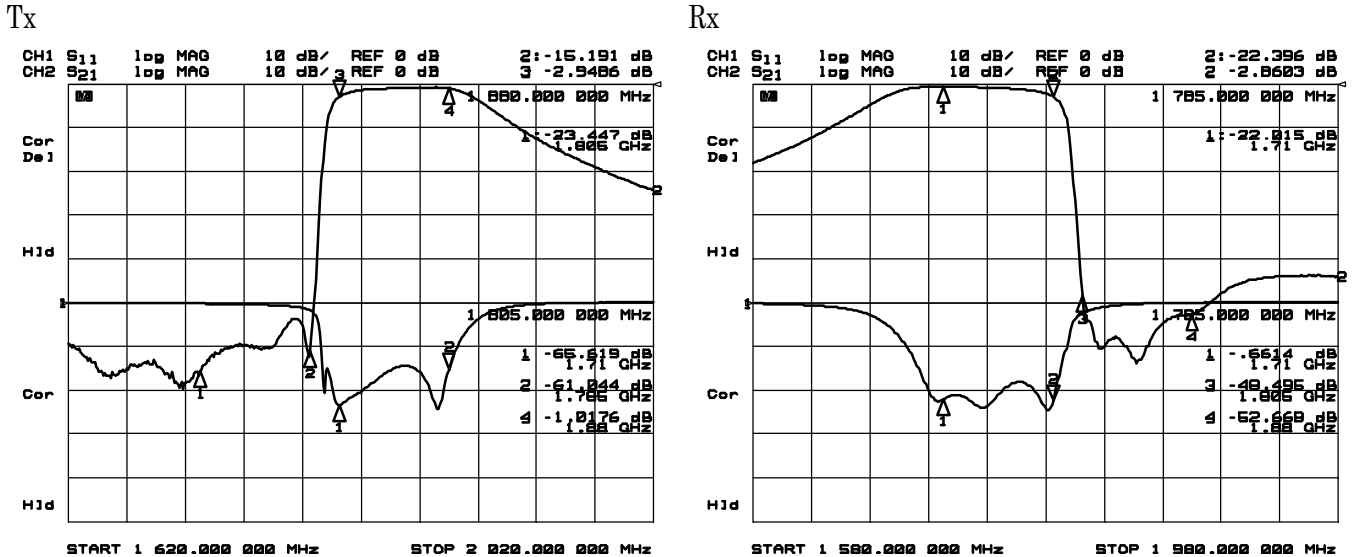


Title Dielectric Filter	Application Duplexer for DCS Base Station	Document No. FM-L228-04	Sheet 2/2
----------------------------	--	----------------------------	--------------

Referenced Land Pattern

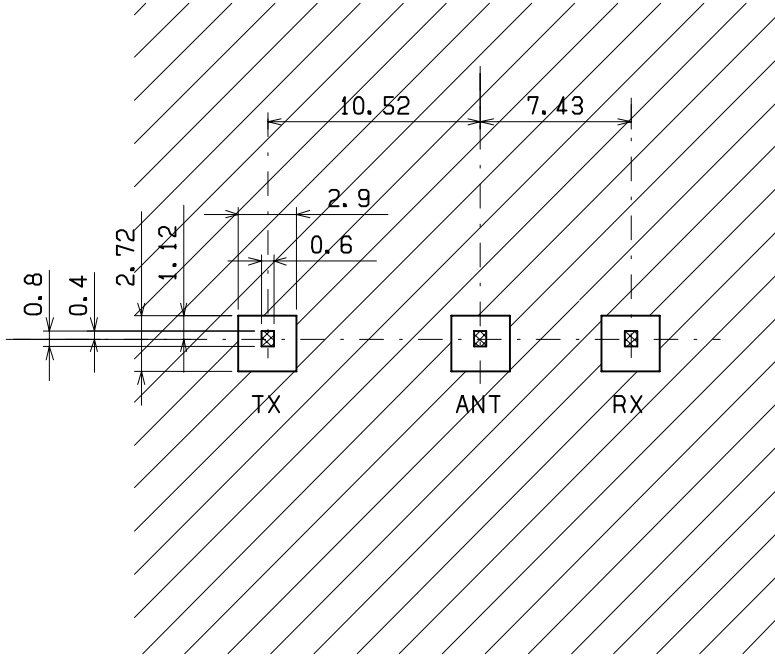

 : Electrode     
  : I/O Electrode

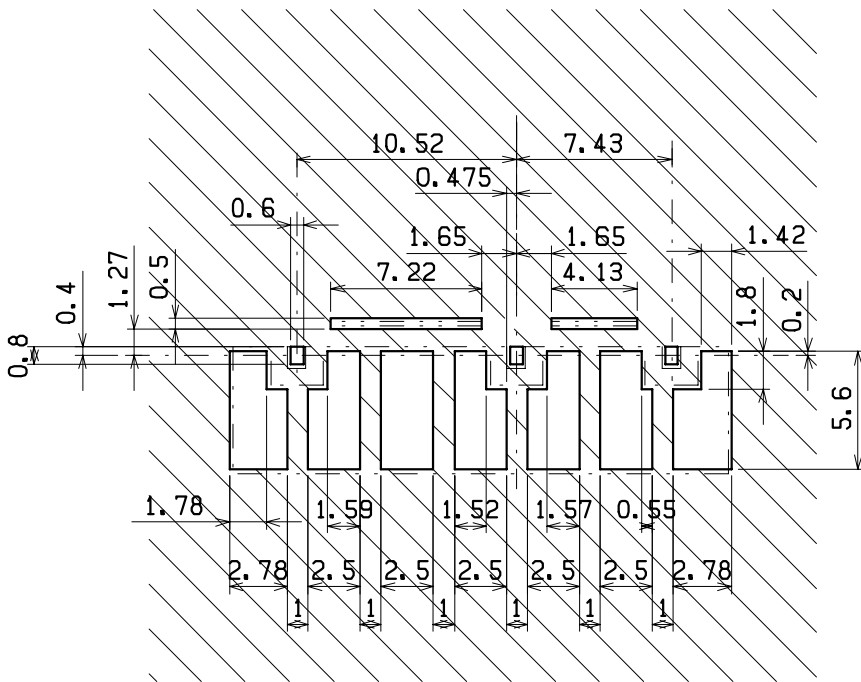

 : Resist     
  : Solder     
 - - - - : Filter Outline

Units : mm