
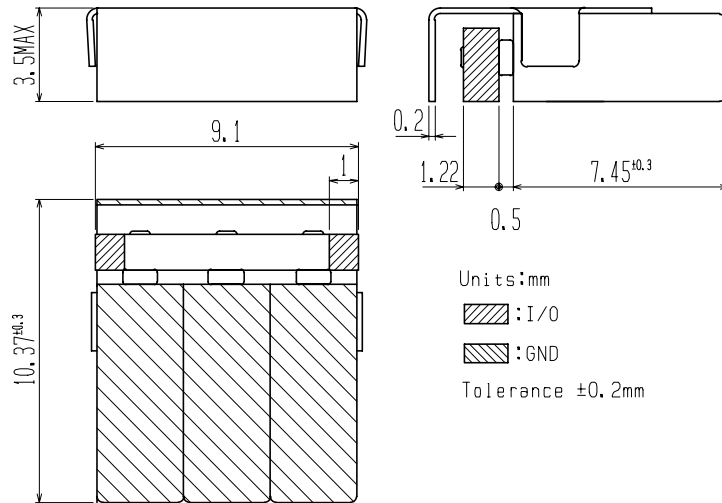


Title Dielectric Filter	Application <b>Band Pass Filter for GPS</b>	Document No. FS-061-00	Sheet 1/2
----------------------------	--	---------------------------	--------------

UBE P/N: UF1575M258

Center Frequency (Fo)	1575 MHz	(1563 to 1587MHz)
Band Width	+/- 12 MHz	
Insertion Loss	1.87 dB	(2.5 dB max)
Ripple	0.25 dB	(1.0 dB max)
Return Loss	19.8 dB	(12.0 dB min)
Attenuation		
@1227MHz	78.2 dB	(70.0 dB min)
Fo -75MHz	35.6 dB	(25.0 dB min)
Fo +75MHz	30.4 dB	(25.0 dB min)

This catalog shows Typical Value [25°C]. The data in ( ) show Specifications [-40°C ~ 85°C].

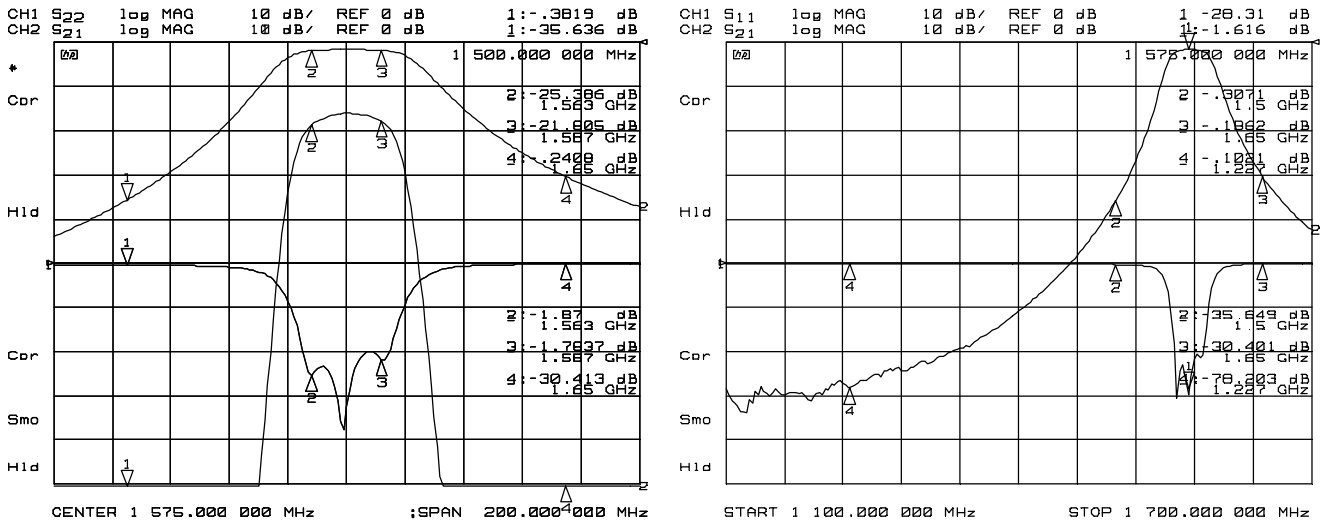

### Outside dimensions

Title Dielectric Filter	Application <b>Band Pass Filter for GPS</b>	Document No. FS-061-00	Sheet 2/2
----------------------------	--	---------------------------	--------------

